
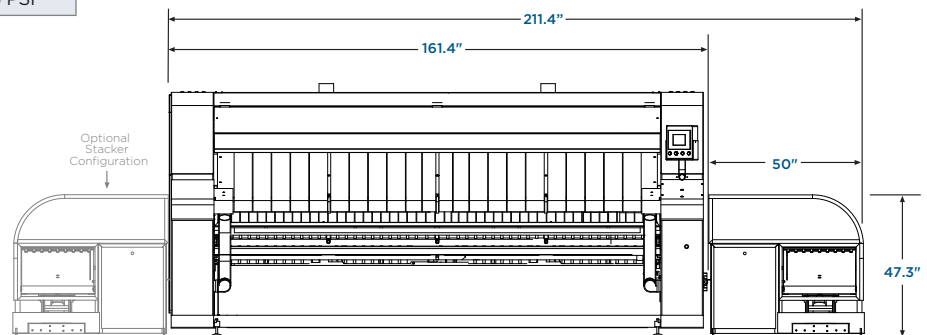
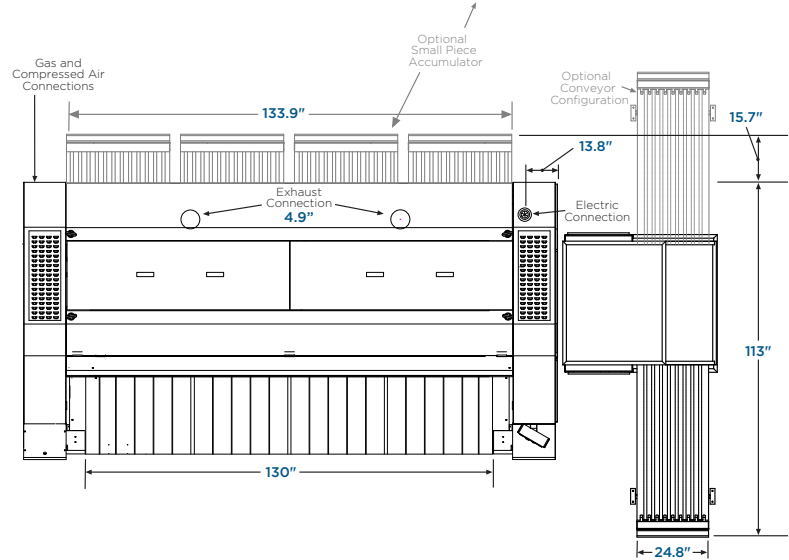


GC24130

COMPACT 5-IN-ONE IRONING SYSTEM

PRODUCT SPECS

Cylinder Diameter <i>inch</i>	24
Usable Cylinder Width <i>inch</i>	130
Evaporation Capability <i>gal/h</i>	22.5
Ironing Speed <i>ft/min</i>	9-32
Net Weight <i>lbs</i>	5071
Crated Weight <i>lbs</i>	7496
Machine Width <i>inch</i>	
machine only	161.4
with stacker	211.4
Machine Depth <i>inch</i>	
machine only	81.9
with stacker	113
with accumulator	97.6
with accumulator & stacker	128.7
Machine Height <i>inch</i>	70.9
Shipping Dimensions <i>inch</i>	165.4 x 87.6 x 74.8
WxDxH	
Feed Height <i>inch</i>	43.3
Electrical Draw <i>Amp</i>	see table below
Exhaust Diameter (x2) <i>inch</i>	4.9
Exhaust Pressure	max inch W.C. 1.18
Gas Connection <i>inch</i>	
Natural	1
Propane	3/4
Gas Heating <i>BTU/h</i>	318,000
Gas Supply Pressure	1 - 7 PSI
Compressed Air Connection <i>inch</i>	1/2 NPT ID
Compressed Air Flow <i>cfm</i>	15 @ 116 PSI

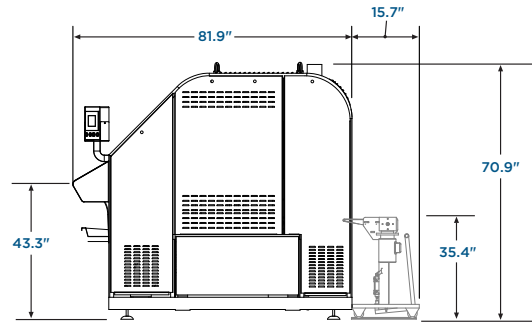

ELECTRICAL CONSUMPTION

	208V	220V	240V	400V	440V	480V
GC24	27.69A	26.18A	24.00A	14.40A	13.09A	12.00A
GC32	29.61A	28.00A	25.66A	15.40A	14.00A	12.83A
MULTI-LANE <i>(option)</i>	+3.65A	+3.45A	+3.17A	+1.90A	+1.73A	+1.58A
STACKER <i>(option)</i>	+3.65A	+3.45A	+3.17A	+1.90A	+1.73A	+1.58A
FEEDER <i>(option)</i>	+2.73A	+2.58A	+2.37A	+1.42A	+1.29A	+1.18A
REAR STACKER <i>(option)</i>	+2.12A	+2.00A	+1.83A	+1.10A	+1.00A	+0.92A

* Specifications subject to change without notice or obligation. Contact Girbau Industrial at (800) 256-1073 for dimensions not shown or for clarification.