


## ON-PREMISE E-SERIES SOFT-MOUNT WASHER-EXTRACTOR

| Capacity Ibs   | 40   |
|--|--|
| Cylinder Diameter inch   | 27.6   |
| Cylinder Depth inch  | 17.7   |
| Cylinder Volume cu ft  | 6.1  |
| Net Weight Ibs   | 1049   |
| Crated Weight Ibs  | 1091   |
| Machine Dimensions <i>inch</i> WxDxH   | 34.2 x 37.9 x 55.3   |
| Door Opening inch  | 16.8   |
| Floor to Door inch   | 20.3   |
| Shipping Dimensions inch WxDxH   | 35.3 × 40 × 61.6   |
| Washing Speed <i>rpm</i> Logi Control Inteli Control   | 45<br>17/23/30/37/44   |
| Spin Speeds <i>rpm</i> Logi Control Inteli Control   | 45/100/375/570/750/950<br>44/100/375/570/750/950   |
| G-force  | 0.8/3.9/55/127/220/354   |
| Static Force Transmitted <i>Ibs</i>  | 1237   |
| Dynamic Force Transmitted <i>Ibs</i>   | 212  |
| Frequency of Dynamic Force Hz  | 15.8   |
| Available Voltages/Wire Conductor/Amp<br>Hot Water (standard)<br>Electric Auxiliary Heat (optional)<br>Electric Auxiliary Heat (optional)<br>Electric Auxiliary Heat (optional)<br>Electric Auxiliary Heat (optional)<br>Steam Auxiliary Heat (optional) | 208-240/60/1, 2W+G, 10<br>208/60/1, 2W+G, 45<br>240/60/1, 2W+G, 60<br>208/60/3, 2W+G, 40<br>240/60/3, 3W+G, 50<br>240/60/1, 2W+G, 10 |
| Modified Energy Factor (MEF)   | 1.96   |
| Water Consumption Factor (WCF)   | 5.04   |
| Drain Diameter inch  | 3  |
| Water Inlets inch  | 2 @ 3/4  |
| Recommended Water Pressure PSI   | 30-60  |
| Water Flow gal/min   | 16   |
| Steam Connection inch  | 1/2  |
| Steam Pressure (optional) PSI  | 29-87  |
| Steam Flow (optional) lbs/h  | 176  |
| Total Power kW   | 1.3  |
| Electrical Heating Power (optional) kW<br>Single Phase 240V<br>Three Phase 240V  | 10.6<br>15.6   |
|  |  |

<sup>\*</sup> Specifications subject to change without notice or obligation. Contact Poseidon Textile Care at (800) 256-1073 for dimensions not shown or for clarification.

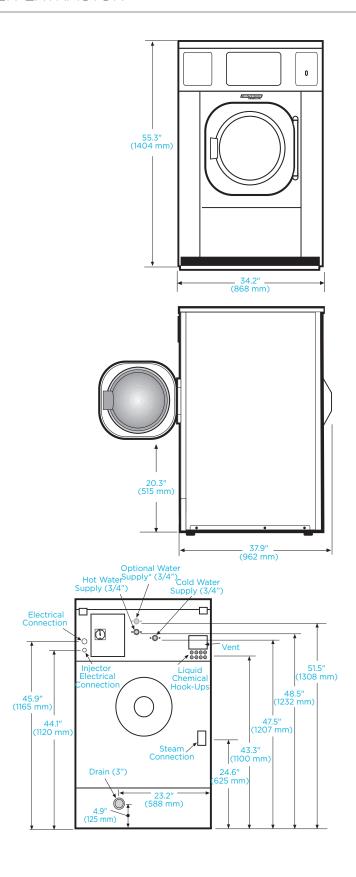

<sup>\*</sup> Modified Energy Factor (MEF) measured in cubic feet per kilowatt-hour per cycle. Water Consumption Factor (WCF) measured in gallons per cycle per cubic feet. MEF and WCF statistics are according to DOE test results report by Intertek, an independent testing laboratory, dated February 27, 2007.