



GIRBAU

NORTH AMERICA

LAUNDRY BEYOND LAUNDRY

Girbau Equipment Firmware Update



Requirements

- Windows operating system of Windows 11 or Windows 10
- Cable requirements (not included)
 - A to B USB cable
- Serial/ Communication Boards
 - Included on some machines



Loading Software

- With the power off on the washing machine, connect the A to B USB cable to the serial communications board (its mounted to the backside of your main circuit board) and the other side of the cable to your computer (red arrows).
- Make sure all other cables are unplugged from the serial-comm board (blue arrows). Other communication systems might cause interference with the update process.
- Turn on the washing machine
 - You might hear a series of beeps when successfully connected

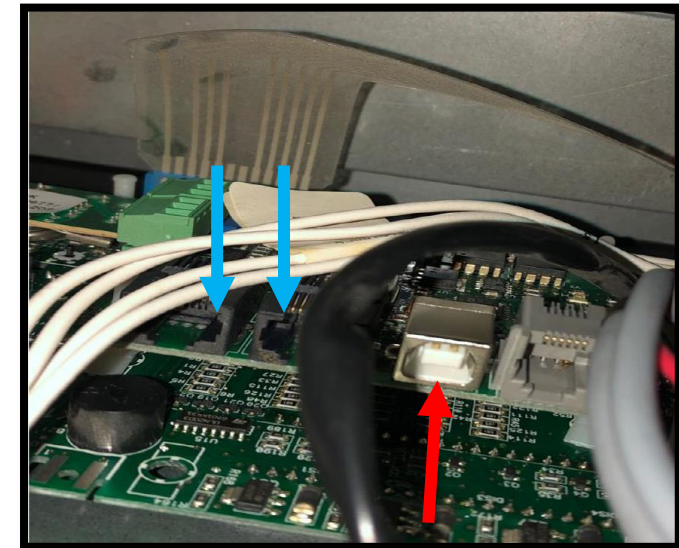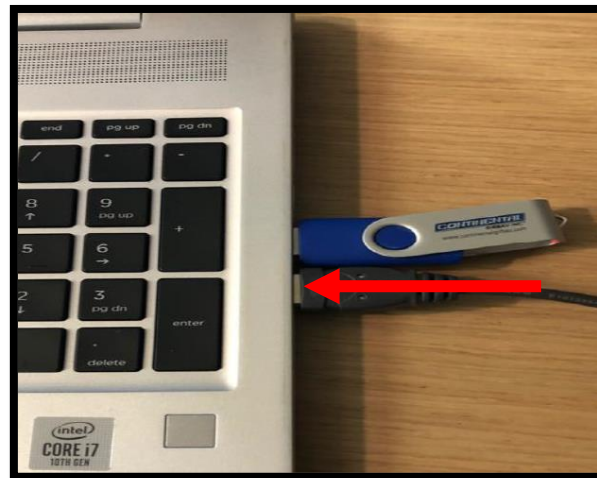


Program Loader

- There should be a GMP Tool shortcut on your desktop when you previously loaded the GMP Tool program on your computer

- Click on that icon




- Click on the .bin file

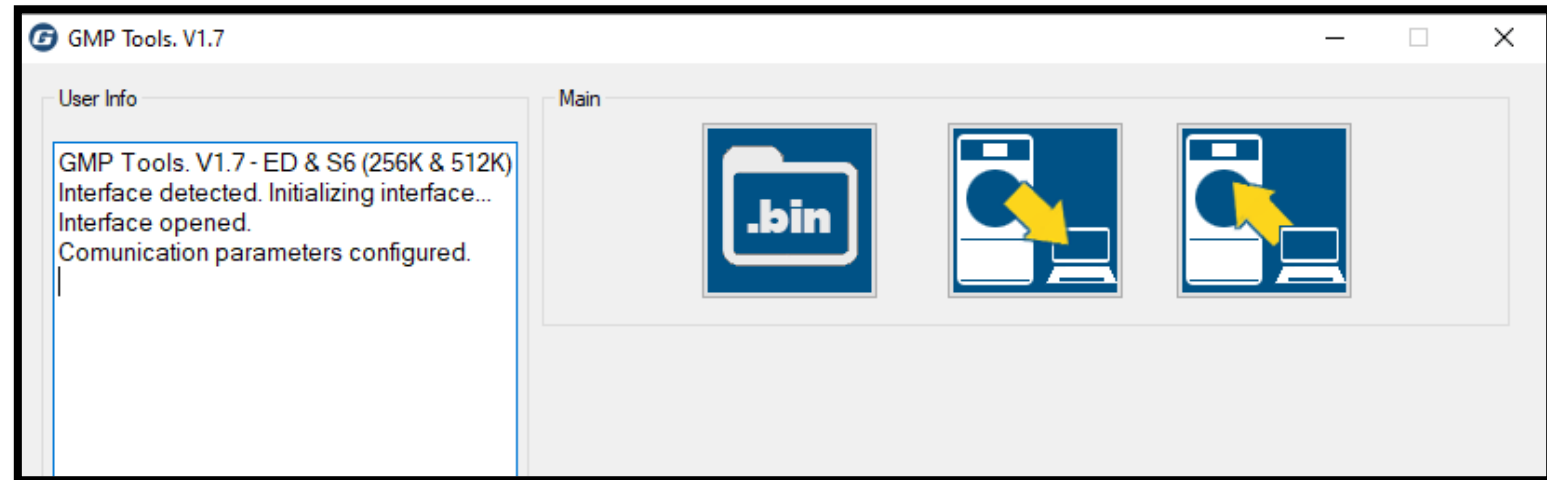


Loading the Software

- Click on the USB Drive, and access the Series 6 Bin files
- Select the appropriate model of the machine and its bin file
- Click Open

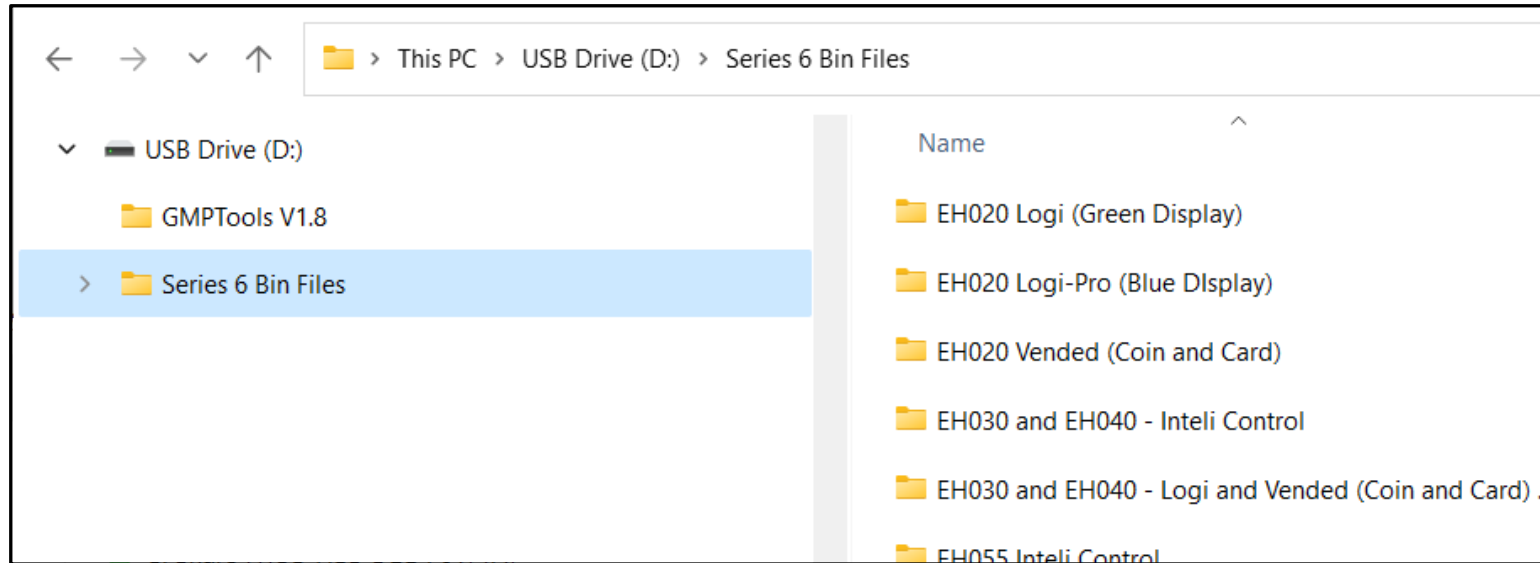




Loading the Software

- File selected will show in left info
- Click on the Update
- Skip Connect Step can be used if recovering from an Update process was stalled or interrupted in middle of Firmware update

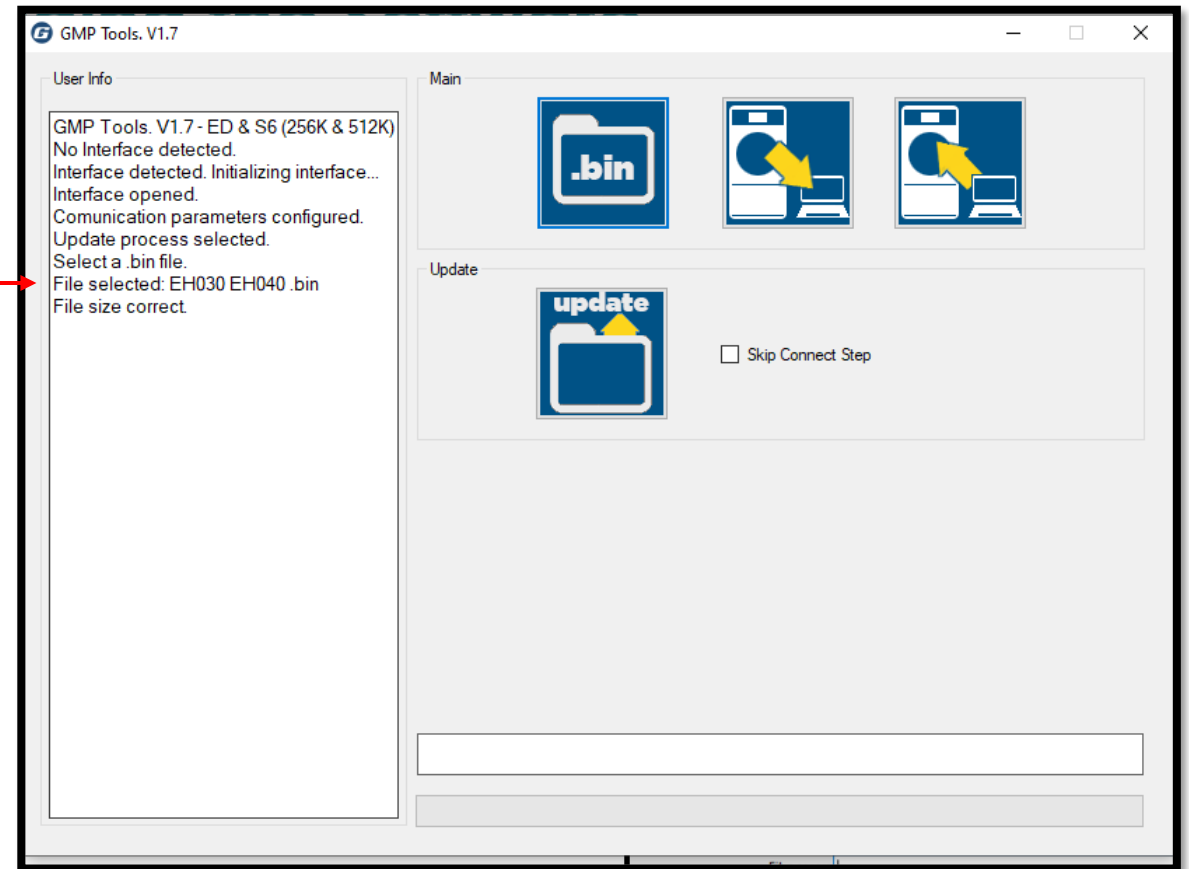

Loading the Software

- Display on the washing machine will flash (UPdt) for Logi & Vended, for Inteli control, will display checkered board pattern
- When complete the screen will show - Program Correct Updated

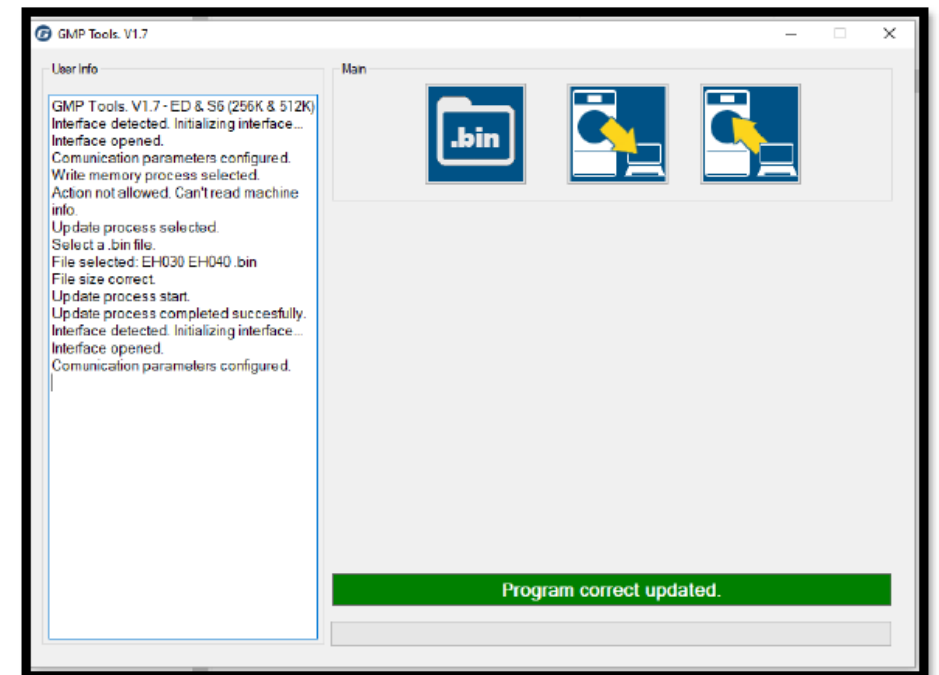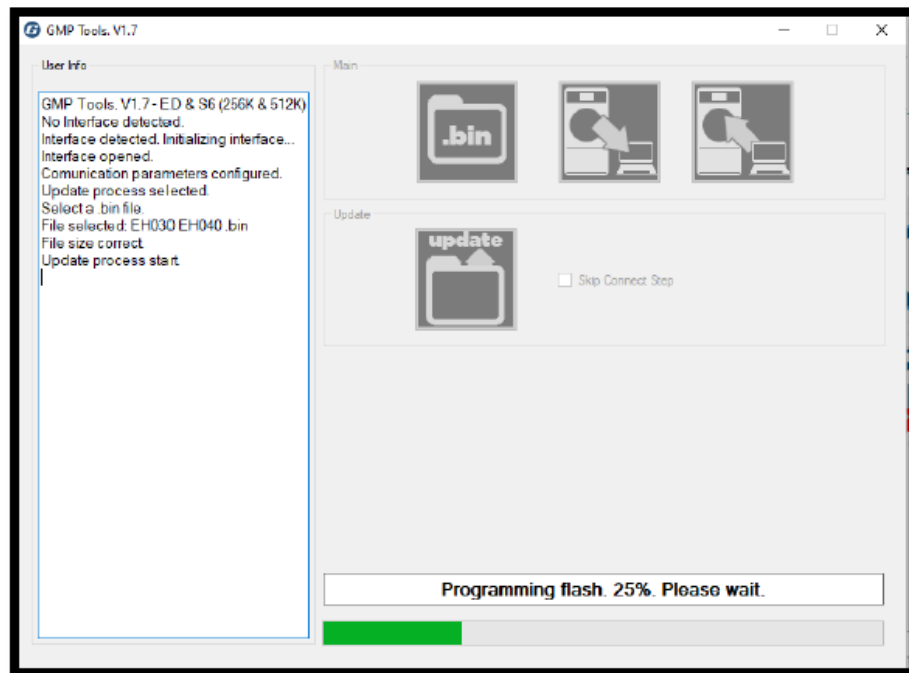

Loading the Software

- Disconnect power and disconnect the USB A-to-B cable
- Remove serial-comm board if installed for update
 - Comm-board can be reused for other machine updates
- Will need to download and to verify the parameters on EH055 washers and larger