


Cylinder Diameter	r inch	20.1
Usable Cylinder Width inch		124.6
Evaporation Capa Gas Electric Steam	bility <i>gal/h</i>	15.85 13.21 18.49
Ironing Speed ft/	<i>ímin</i>	4-49
Net Weight <i>Ibs</i> Gas/Electric	without folder with folder	3137 3497
Steam	without folder with folder	3379 3739
Crated Weight <i>Ib.</i> Gas/Electric Steam	s without folder with folder without folder with folder	3876 4290 4118 4533
Machine Width ir	nch	161.5
Machine Depth ir	nch	46.2
Machine Height <i>i</i>	nch	64.2
Feed Height inch		40.6
Shipping Dimension without folder with folder	ons (WxDxH) inch	167.3 x 45.5 x 71.9 167.3 x 50.6 x 71.9
Motor Power <i>Hp</i> Roller Motor Extraction Moto	r	0.40 0.74
Exhaust Diameter	inch	5.1 (130)
Exhaust Air Flow Gas Electric/Steam	cfm	564 634
Electric Heating / 208/60/3 240/60/3	k₩	47.32 63
Gas Connection	nch	3/4 NPT
Gas Heating <i>BTU</i> Natural Propane	/h	256,593 256,934
Gas Consumption Natural Propane	cfm	4.69 12.66
Gas Pressure Oper Natural Propane	ating Manifold <i>inch wc</i>	7 11
Steam Connection	n <i>inch</i>	1
Steam Condensat	e Outlet <i>inch</i>	3/4
Steam Heating B	TU/h	277,748
Steam Consumpt	on <i>lbs/h</i>	317
Steam Pressure P	PSI	116
Safety Valve Connection inch		1
Circuit Protection Amps		
Gas/Steam 2 Electric	208-240/60/1 208/60/3 240/60/3	10 200 200
Full Load Amps		
Gas/Steam 2 Electric	208-240/60/1 208/60/3 240/60/3	6.1 137 158

FRONT VIEW 161.5" -Exhaust Connection ο 64.2" J.I. 8.8 Gas Ste Gas
Connection Conr 12.1" U, Steam Safety Valve trical /+ 5 2 10.6"

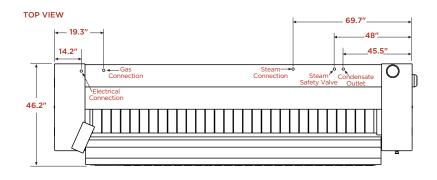

AREA NEEDED FOR SERVICE

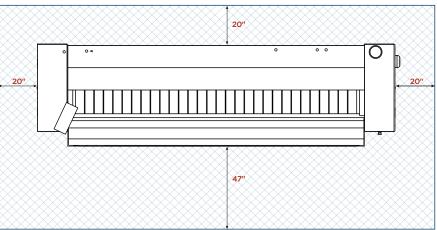





* Specifications subject to change without notice or obligation. Contact OnePress Ironer at (800) 256-1073 for dimensions not shown or for clarification.

> onepressironer.com • (800) 256-1073 2500 State Road 44 • Oshkosh, WI 54904