
EH080 ON-PREMISE E-SERIES SOFT-MOUNT WASHER-EXTRACTOR

Capacity Ibs	80
Cylinder Diameter inch	32.5
Cylinder Depth inch	23.5
Cylinder Volume cu ft	11.3
Net Weight Ibs	1499
Crated Weight <i>Ibs</i>	1583
Machine Width <i>inch</i>	41.5
Machine Depth <i>inch</i>	52
Machine Height inch	59.1
Door Opening inch	16.8
Floor to Door <i>inch</i>	23.6
Shipping Dimensions <i>inch</i> WxDxH	42.3 x 52 x 65.2
Washing Speeds <i>rpm</i>	21/26/36/42
Spin Speeds rpm	83/335/530/698/931
G-force	3.17/52/130/225/400
Static Force Transmitted Ibs	1850
Dynamic Force Transmitted Ibs	412
Frequency of Dynamic Force Hz	15.5
Available Voltages / Wire Conductor / / Hot Water (standard) Electric Auxiliary Heat (optional) Electric Auxiliary Heat (optional) Steam Auxiliary Heat (optional)	Amp 208-240/60/3, 3W+G, 10 208/60/3, 3W+G, 60 240/60/3, 3W+G, 60 208-240/60/3, 3W+G, 10
Drain Diameter inch	3
Water Inlets inch	2 @ 3/4
Recommended Water Pressure PSI	30-60
Water Flow gal/min	16
Steam Connection inch	1/2
Steam Connection Inch Steam Pressure (optional) PSI	1/2 29-87
	,
Steam Pressure (optional) PSI	29-87

* Specifications subject to change without notice or obligation. Contact Poseidon Textile Care at (800) 256-1073 for dimensions not shown or for clarification.

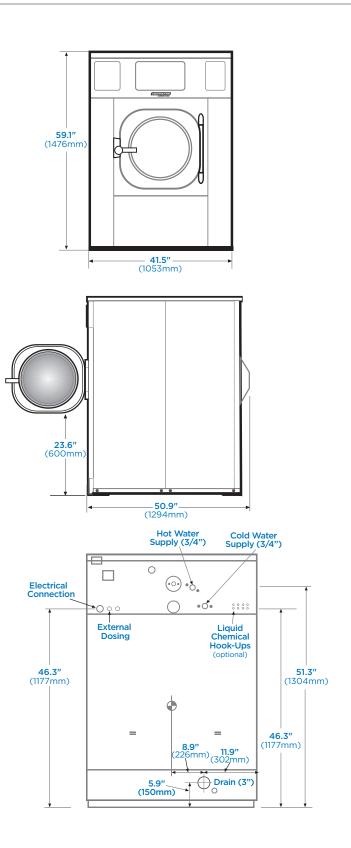

ARCHITECTURAL/MECHANICAL

PRODUCT SPECIFICATIONS

